


### Product Data Sheet

# UU 20U-10 NA FSTR/GL white HACCP FDA

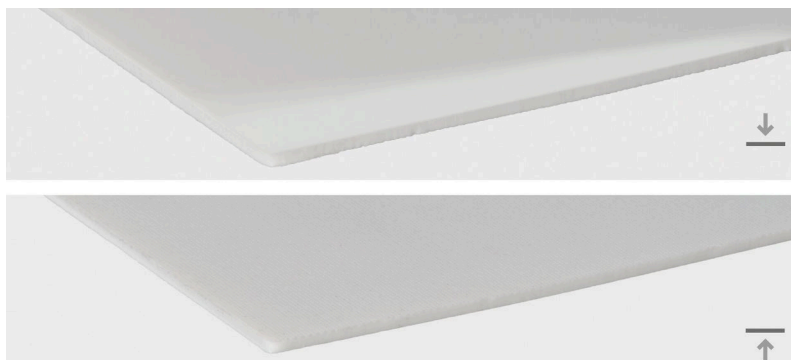

Art. No.: 855658

M 1:2

### Applications

<b>Beverage / Packaging</b>	Checkweighers; Plastic film and shrink wrapping machines
<b>Meat / Poultry / Seafood</b>	Buffer conveyors; Slicers
<b>Application Group</b>	Elastic Food Tapes

### Order information

<b>Article number</b>	855658
<b>Standard delivery width</b>	500 mm / 19.69 in
<b>Maximal delivery width (without longitudinal seam) on request</b>	1000 mm / 39.37 in

### UU 20U-10 NA FSTR/GL white HACCP FDA

#### Construction

Surface material top face	Polyurethane
Surface pattern	Smooth
Color	White (~RAL 9003)
Surface material underside	Polyurethane
Surface pattern	Fine texture
Color	White (~RAL 9003)
Tension member material	Polyurethane, elastic

#### Technical data

Total thickness	1 mm ± 0.1 0.039 in ± 0.004
Weight	1.15 kg/m <sup>2</sup> 0.236 lbs/ft <sup>2</sup>
Fw' at 1 % elongation at fitting	0.22 N/mm / 1.26 lbf/in
Relaxed specific shaft load at 1 % elongation at fitting and 180° arc of contact in N/mm belt width.	
k1% value relaxed	0.11 N/mm / 0.63 lbf/in
Recommended Elongation at fitting min.	3 %
Recommended Elongation at fitting max.	8 %
Depending on the application, different elongation at fitting might be necessary. Please enquire.	
Friction coefficient of top face against steel panel according to internal test instruction	1.2
Friction coefficient of underside against steel panel according to internal test instruction	1.2
Permissible operating temperature	-20/60 °C, for a short time 70 °C -4/140 °F, for a short time 158 °F

### UU 20U-10 NA FSTR/GL white HACCP FDA

#### Properties

<b>Troughable</b>	Yes
<b>Suitable for accumulation</b>	No
<b>Easy cleaning</b>	Yes
<b>Highly elastic</b>	Yes
<b>Not susceptible to shocks</b>	Yes
<b>Not sensitive to climatic fluctuation</b>	Yes

#### Food properties

<b>(EU) 10/2011 and (EC) 1935/2004</b>	Suitable for the transport of unpacked Food in compliance with food safety regulation (EU) 10/2011 and regulation (EC) 1935/2004
<b>FDA 21CFR</b>	Suitable for the transport of unpacked Food in compliance with FDA regulation 21CFR
<b>MHLW 370</b>	Compliant to the regulation MHLW 370 (Ministry of Health and Welfare Notification No. 370) for the transport of unpackaged foodstuffs.
<b>HACCP</b>	Special design that supports the HACCP concept; resistant to hot water; ideal for frequent cleaning cycles.

#### Electrostatic properties

<b>Not antistatic</b>	Belt material with electrically insulating properties
-----------------------	---

#### Fabrication

<b>Profiles on top face</b>	On request
<b>Profiles on underside</b>	On request

### UU 20U-10 NA FSTR/GL white HACCP FDA

#### Minimum drum diameter

##### Mechanical fasteners

Z- splice - 35 x 11,5 mm, counter-bending 20 mm / 0.8 in

Z- splice - 35 x 5,75 mm, counter-bending 20 mm / 0.8 in

Butt joint, counter-bending 20 mm / 0.8 in

Endless with overlap 2mm (elastic), counter-bending 20 mm / 0.8 in

Remarks Rolling knife edge possible

#### Remarks

- ▶ Suitable for short center distances with  $L/W < 1$ . Extreme small pulley diameter possible.
- ▶ In some applications, the belt can be operated at an elongation at fitting below the recommended minimum..

Chemical resistance U

The physical data in this data sheet is approximate, can alter depending on production environments. The belts should be stored under normal ambient conditions climate (23 °C, 50 % humidity) as per DIN EN ISO 291. Fluctuations in climate can cause variations. See our brochure "Compendium Flat Belts" no. 333 which shows the types of belts that can be supplied and the manufacturing tolerances. Customised types require written confirmation.

Date of last change: 6/27/2022 9:33:31 AM