


Product Data Sheet

E 4/2 U0/U2 MT-HACCP white FDA

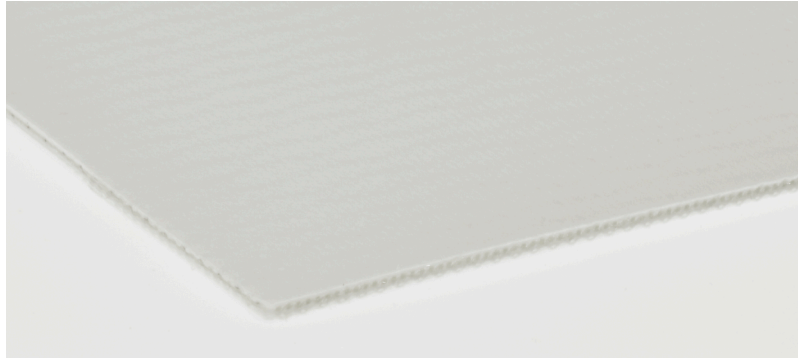

Art. No.: 900207

M 1:2

Applications

Agriculture

Bakery industry

Cutting devices and stamping devices for dough

Candy industry

Forming of chocolate bars and cereal bars

Chemistry

Food industry

Accumulation belt / Discharge belt; Feeder belt / transfer belt

Printing industry

Finishing, post press, mail room, discharge, cross-cutter; Web folder newspaper (coldset)

Tire/Rubber

Wood industry

Varnish coating belt

Application Group

Mini conveyor (see remarks)

E 4/2 U0/U2 MT-HACCP white FDA

Order information

Article number	900207
Suitable for corrugated side walls	Yes (HF recommend)
Standard delivery width	3100 mm / 122.05 in
Maximal delivery width (without longitudinal seam) on request	4650 mm / 183.07 in
Longitudinal seam possible	Yes

Construction

Top face material	Polyurethane
Surface pattern	Matte
Coating thickness	0.2 mm / 0.008 in
Color	White
Driving face material	Polyurethane impregnation
Surface pattern	Fabric
Color	Transparent
Tension member material	Laterally stiff fabric of polyester warp and weft
Number of fabric plies	2
Driving face weave	Plain weave

E 4/2 U0/U2 MT-HACCP white FDA

Technical data

Total thickness	1.35 mm ± 0.15 0.053 in ± 0.006
Weight	1.55 kg/m ² ± 0.2 0.317 lbs/ft ² ± 0.041
k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005	4 N/mm / 22.84 lbf/in
Recommended Elongation at fitting min.	0.3 %
Recommended Elongation at fitting max.	1 %
Friction coefficient of driving face against steel panel according ISO 21182	0.15
Friction coefficient of top face against steel panel according ISO 21182	0.57
Permissible operating temperature	-30/100 °C, for a short time 120 °C -22/212 °F, for a short time 248 °F
Hardness of top face coating as per DIN 53505 (Shore A)	92
Heat transfer coefficient	120 W/(K*m ²)

Properties

Lateral stiffness	Laterally stiff
Troughable	No
Suitable for accumulation	Yes
Inclined conveying	No
Suitable for knife edges	Yes
Suitable for curves	No
Flame-retardant	No
Noise development	Normal
Belt support	Slider bed (support rollers possible)

E 4/2 U0/U2 MT-HACCP white FDA

Food properties

(EU) 10/2011 and (EC) 1935/2004	Suitable for the transport of unpacked Food in compliance with food safety regulation (EU) 10/2011 and regulation (EC) 1935/2004
FDA 21CFR	Suitable for the transport of unpacked Food in compliance with FDA regulation 21CFR
MHLW 370 V2020	Compliant to the regulation MHLW 370 (Ministry of Health and Welfare Notification No. 70 Version 2020) for the transport of unpackaged foodstuffs.
Halal	Certificated Halal product. Meets trade description order 2011 and CODEX Alimentarius 1997 guidelines under supervision of Islamic Food Research Centre Hong Kong & Asia Region
HACCP	Special design that supports the HACCP concept; resistant to hot water; ideal for frequent cleaning cycles.

Electrostatic properties

Antistatic	Belt material with an electrically conductive antistatic agent. Volume resistance (RDi) in longitudinal direction parallel to plane of belt <math>< 3 \times 10^8 \Omega</math>. Measurement according DIN EN ISO 21178.
-------------------	--

Fabrication

Belt edge sealing	Smartseal; Proseal
Suitable for corrugated side walls	Yes (HF recommend)
Profiles on top face	Yes
Profiles on underside	Yes
Mechanical fasteners	KS; CS-05; HS-21

Minimum drum diameter

Z-splice, counter-bending	24 mm / 0.9 in
Z-splice, bending	14 mm / 0.6 in
Z-splice, minimum radius fixed knife edge	3 mm / 0.1 in

E 4/2 U0/U2 MT-HACCP white FDA

Remarks

► **In case of using the material for a mini-conveyor application, give enough tension to prevent slippage under maximum load.**

Chemical resistance U

The physical data in this data sheet is approximate, can alter depending on production environments and was established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN 50014/ISO 554. Fluctuations in climate can cause variations. See our brochure "Technical Information 1" no. 317 which shows the types of belts that can be supplied and the manufacturing tolerances. Customised types require written confirmation.

Date of last change: 3/24/2025 6:30:45 AM