


Product Data Sheet

E 8/2 U0/V/R15 LG-SE black

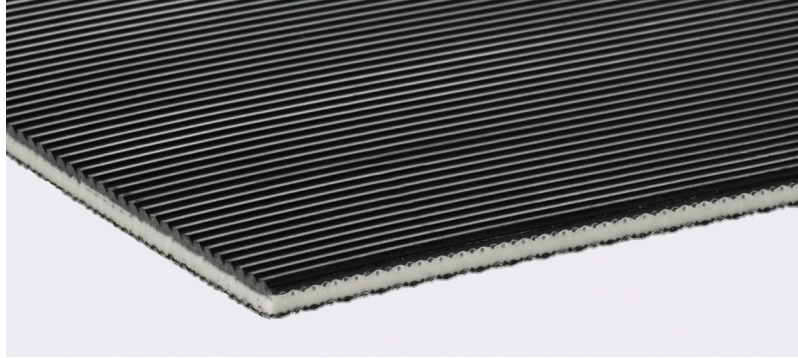

Art. No.: 901004

M 1:2

Applications

Airport logistics	Tray conveyor
General material handling	Inclined conveying of unit goods / containers in wet sectors
Logistics	Acceleration conveyor; Drag (Twin) belt conveyor systems; High speed conveyor

Order information

Article number	901004
Suitable for corrugated side walls	No
Standard delivery width	3000 mm / 118.11 in
Longitudinal seam possible	Yes



E 8/2 U0/V/R15 LG-SE black

Construction

Top face material	High Grip
Surface pattern	Longitudinal rib
Coating thickness	1.5 mm / 0.059 in
Color	Black (~RAL 9005)
Driving face material	Polyurethane impregnation
Surface pattern	Fabric
Color	Transparent
Tension member material	Laterally stiff fabric of polyester warp and weft
Number of fabric plies	2
Driving face weave	Twill weave, low-noise

Technical data

Total thickness	3.1 mm ± 0.2 0.122 in ± 0.008
Weight	3.5 kg/m² ± 0.2 0.717 lbs/ft² ± 0.041
k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005	5 N/mm / 28.55 lbf/in
Recommended Elongation at fitting min.	0.3 %
Recommended Elongation at fitting max.	1 %
Friction coefficient of driving face against steel panel according ISO 21182	0.19
Permissible operating temperature	-10/70 °C, for a short time 90 °C 14/158 °F, for a short time 194 °F
Hardness of top face coating as per DIN 53505 (Shore A)	45

E 8/2 U0/V/R15 LG-SE black

Properties

Lateral stiffness	Laterally stiff
Troughable	No
Suitable for accumulation	No
Inclined conveying	Yes
Suitable for knife edges	No
Suitable for curves	No
Flame-retardant	Flame-retardant according to EN 20340/ISO 340 and ASTM 378-D
Noise development	Low noise
Coating/fabric exceptionally cut resistant	Yes
Belt support	Slider bed (support rollers possible)

Food properties

	Not suitable for the transport of unpacked food according (EU) 10/2011 and (EC) 1935/2004, FDA 21CFR or MHLW 370.
--	---

Electrostatic properties

Antistatic	Belt material with an electrically conductive antistatic agent. Volume resistance (RDi) in longitudinal direction parallel to plane of belt $< 3 \times 10^8 \Omega$. Measurement according DIN EN ISO 21178.
------------	--

Fabrication

Suitable for corrugated side walls	No
Profiles on top face	On request
Profiles on underside	Yes
Mechanical fasteners	KS; HS-24

E 8/2 U0/V/R15 LG-SE black

Minimum drum diameter

Z-splice, counter-bending	60 mm / 2.4 in
Z-splice, bending	30 mm / 1.2 in

Remarks

- Suitable for high-speed conveyor up to 12 m/s.
- High grip conveying side for high acceleration.
- Lower noise at belt return/counter-bending compared to RT/ MRT pattern.

Chemical resistance	On request
----------------------------	------------

The physical data in this data sheet is approximate, can alter depending on production environments and was established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN 50014/ISO 554. Fluctuations in climate can cause variations. See our brochure "Technical Information 1" no. 317 which shows the types of belts that can be supplied and the manufacturing tolerances. Customised types require written confirmation.

Date of last change: 7/4/2023 7:36:41 AM