


Product Data Sheet

E 8/2 U0/V15 LG-SE black

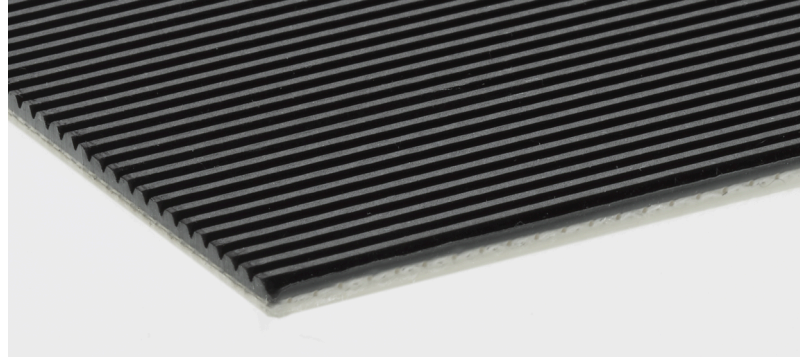

Art. No.: 906313

M 1:2

Applications

Airport logistics

General material handling Inclined conveying of unit goods / containers

Logistics Acceleration conveyor; Braking conveyor; Drag (Twin) belt conveyor systems; High speed conveyor; Parcel handling; Start-Stop conveyor; Strip belt merge

Order information

Article number 906313

Suitable for corrugated side walls No

Standard delivery width 3000 mm / 118.11 in

Maximal delivery width (without longitudinal seam) on request 4600 mm / 181.1 in

Longitudinal seam possible Yes

siegling transilon

conveyor and processing belts

E 8/2 U0/V15 LG-SE black

Construction

Top face material	Polyvinyl chloride
Surface pattern	Longitudinal rib
Coating thickness	1.5 mm / 0.059 in
Color	Black
Driving face material	Polyurethane impregnation
Surface pattern	Fabric
Color	Transparent
Tension member material	Laterally stiff fabric of polyester warp and weft
Number of fabric plies	2
Driving face weave	Twill weave, low-noise

Technical data

Total thickness	3.1 mm ± 0.2 0.122 in ± 0.008
Weight	3.4 kg/m ² ± 0.2 0.696 lbs/ft ² ± 0.041
k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005	7.5 N/mm / 42.83 lbf/in
Recommended Elongation at fitting min.	0.3 %
Recommended Elongation at fitting max.	1 %
Friction coefficient of driving face against steel panel according ISO 21182	0.2
Permissible operating temperature	-20/80 °C, for a short time 90 °C -4/176 °F, for a short time 194 °F
Hardness of top face coating as per DIN 53505 (Shore A)	45

E 8/2 U0/V15 LG-SE black

Properties

Lateral stiffness	Laterally stiff
Troughable	No
Suitable for accumulation	No
Inclined conveying	Yes
Suitable for knife edges	No
Suitable for curves	No
Flame-retardant	Flame-retardant according to EN 20340/ISO 340 and ASTM 378-D
Noise development	Low noise
Belt support	Slider bed (support rollers possible)

Electrostatic properties

Antistatic	Belt material with an electrically conductive antistatic agent. Volume resistance (RDi) in longitudinal direction parallel to plane of belt $< 3 \times 10^8 \Omega$. Measurement according DIN EN ISO 21178.
-------------------	--

Fabrication

Belt edge sealing	Smartseal; Proseal
Suitable for corrugated side walls	No
Profiles on top face	Yes
Profiles on underside	Yes
Mechanical fasteners	KS; CS-06; CS-05; HS-24; HS-22; HS-21

E 8/2 U0/V15 LG-SE black

Minimum drum diameter

Z-splice, counter-bending	60 mm / 2.4 in
Mechanical fastener, counter-bending	60 mm / 2.4 in
Stepped overlap splice, counter-bending	60 mm / 2.4 in
Stepped Z-splice, counter-bending	60 mm / 2.4 in
Z-splice, bending	30 mm / 1.2 in
Remarks	Approved for VarioBelt conveyor systems (Bending: 36 mm drum diameter)

Remarks

► Lower noise at belt return/counter-bending compared to RT/ MRT pattern.

Chemical resistance	V
----------------------------	---

The physical data in this data sheet is approximate, can alter depending on production environments and was established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN 50014/ISO 554. Fluctuations in climate can cause variations. See our brochure "Technical Information 1" no. 317 which shows the types of belts that can be supplied and the manufacturing tolerances. Customised types require written confirmation.

Date of last change: 9/4/2024 11:37:57 AM