


### Product Data Sheet

# E 8/2 U0/R15 LG-SE black

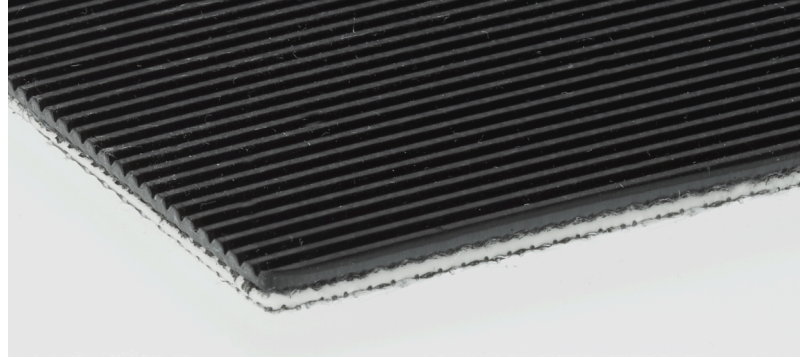

Art. No.: 906706

M 1:2

### Applications

#### Airport logistics

**General material handling** Inclined conveying of unit goods / containers

**Logistics** Acceleration conveyor; Braking conveyor; Drag (Twin) belt conveyor systems; High speed conveyor; Parcel handling; Pre-sorters with in- and outfeed merges ; Start-Stop conveyor

### Order information

**Article number** 906706

**Suitable for corrugated side walls** No

**Standard delivery width** 3000 mm / 118.11 in

**Longitudinal seam possible** Yes

## siegling transilon

conveyor and processing belts

### E 8/2 U0/R15 LG-SE black

#### Construction

<b>Top face material</b>	High Grip
<b>Surface pattern</b>	Longitudinal rib
<b>Coating thickness</b>	1.5 mm / 0.059 in
<b>Color</b>	Black
<b>Driving face material</b>	Polyurethane impregnation
<b>Surface pattern</b>	Fabric
<b>Color</b>	Transparent
<b>Tension member material</b>	Laterally stiff fabric of polyester warp and weft
<b>Number of fabric plies</b>	2
<b>Driving face weave</b>	Twill weave, low-noise

#### Technical data

<b>Total thickness</b>	3.2 mm ± 0.1 0.126 in ± 0.004
<b>Weight</b>	3 kg/m <sup>2</sup> ± 0.2 0.614 lbs/ft <sup>2</sup> ± 0.041
<b>k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005</b>	5.75 N/mm / 32.83 lbf/in
<b>Recommended Elongation at fitting min.</b>	0.3 %
<b>Recommended Elongation at fitting max.</b>	1 %
<b>Friction coefficient of driving face against steel panel according ISO 21182</b>	0.18
<b>Permissible operating temperature</b>	-30/100 °C, for a short time 120 °C -22/212 °F, for a short time 248 °F
<b>Hardness of top face coating as per DIN 53505 (Shore A)</b>	45

## siegling transilon

conveyor and processing belts

### E 8/2 U0/R15 LG-SE black

#### Properties

<b>Lateral stiffness</b>	Laterally stiff
<b>Troughable</b>	No
<b>Suitable for accumulation</b>	No
<b>Inclined conveying</b>	Yes
<b>Suitable for knife edges</b>	No
<b>Suitable for curves</b>	No
<b>Flame-retardant</b>	Flame-retardant according to EN 20340/ISO 340 and ASTM 378-D
<b>Noise development</b>	Low noise
<b>Belt support</b>	Slider bed (support rollers possible)

#### Electrostatic properties

<b>Antistatic</b>	Belt material with an electrically conductive antistatic agent. Volume resistance (RDi) in longitudinal direction parallel to plane of belt $< 3 \times 10^8 \Omega$ . Measurement according DIN EN ISO 21178.
-------------------	--

#### Fabrication

<b>Belt edge sealing</b>	On request
<b>Suitable for corrugated side walls</b>	No
<b>Profiles on top face</b>	Yes
<b>Profiles on underside</b>	Yes
<b>Mechanical fasteners</b>	KS; CS-06; HS-24

#### Minimum drum diameter

<b>Z- splice - 70 x 11,5 mm, counter-bending</b>	60 mm / 2.4 in
<b>Z- splice - 70 x 11,5 mm, bending</b>	30 mm / 1.2 in
<b>Remarks</b>	Only valid for "Pop-Up" application ( Z splice 110 x 11,5 mm with counter bending and 1% elongation): dmin = 50

### E 8/2 U0/R15 LG-SE black

#### Remarks

- 
- **Not resistant against inorganic acids and leach.**
  - **Lower noise at belt return/counter-bending compared to RT/ MRT pattern.**
- 

**Chemical resistance** On request

---

The physical data in this data sheet is approximate, can alter depending on production environments and was established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN 50014/ISO 554. Fluctuations in climate can cause variations. See our brochure "Technical Information 1" no. 317 which shows the types of belts that can be supplied and the manufacturing tolerances. Customised types require written confirmation.

Date of last change: 9/4/2024 11:37:57 AM