


Product Data Sheet

E 8/2 U0/U2 STR black

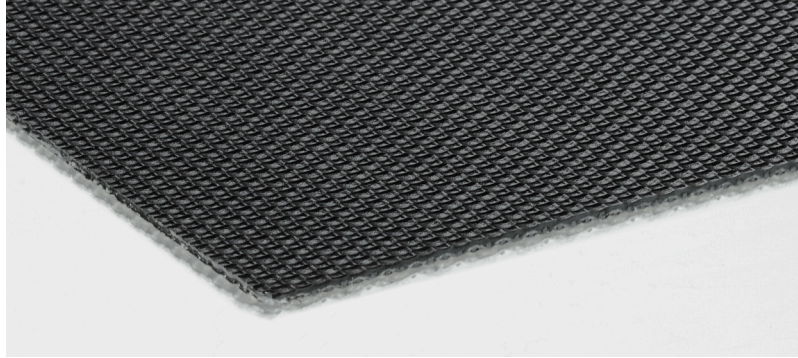

Art. No.: 907207


M 1:2

Applications

Airport logistics	X-ray conveyors for airports
General material handling	Horizontal conveying (metering)

Order information

Article number	907207
Suitable for corrugated side walls	No
Standard delivery width	3000 mm / 118.11 in
Longitudinal seam possible	Yes

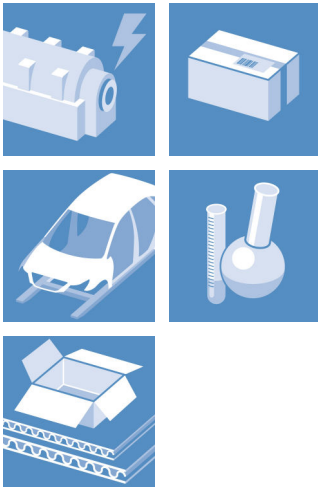

E 8/2 U0/U2 STR black

Construction

Top face material	Polyurethane
Surface pattern	Normal texture
Coating thickness	0.2 mm / 0.008 in
Color	Black
Driving face material	Polyurethane impregnation
Surface pattern	Fabric
Color	Transparent
Tension member material	Laterally stiff fabric of polyester warp and weft
Number of fabric plies	2
Driving face weave	Twill weave, low-noise

Technical data

Total thickness	1.6 mm \pm 0.15 0.063 in \pm 0.006
Weight	1.6 kg/m ² \pm 0.15 0.328 lbs/ft ² \pm 0.031
k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005	7.5 N/mm / 42.83 lbf/in
Recommended Elongation at fitting min.	0.3 %
Recommended Elongation at fitting max.	1 %
Friction coefficient of driving face against steel panel according ISO 21182	0.18
Permissible operating temperature	-30/100 °C, for a short time 120 °C -22/212 °F, for a short time 248 °F
Hardness of top face coating as per DIN 53505 (Shore A)	85

E 8/2 U0/U2 STR black

Properties

Lateral stiffness	Laterally stiff
Troughable	No
Suitable for accumulation	No
Inclined conveying	Limited
Suitable for knife edges	No
Suitable for curves	No
Flame-retardant	No
Noise development	Low noise
Belt support	Slider bed (support rollers possible)

Electrostatic properties

Antistatic	Belt material with an electrically conductive antistatic agent. Volume resistance (RDi) in longitudinal direction parallel to plane of belt $< 3 \times 10^8 \Omega$. Measurement according DIN EN ISO 21178.
-------------------	--

Fabrication

Suitable for corrugated side walls	No
Profiles on top face	On request
Profiles on underside	On request
Mechanical fasteners	KS; HS-03

Minimum drum diameter

Z-splice, counter-bending	24 mm / 0.9 in
----------------------------------	----------------

Remarks

Chemical resistance	U
----------------------------	---

The physical data in this data sheet is approximate, can alter depending on production environments and was established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN 50014/ISO 554. Fluctuations in climate can cause variations. See our brochure "Technical Information 1" no. 317 which shows the types of belts that can be supplied and the manufacturing tolerances. Customised types

E 8/2 U0/U2 STR black

require written confirmation.

Date of last change: 9/12/2023 10:40:10 AM