


Product Data Sheet

PVC120 P CxB-NA black

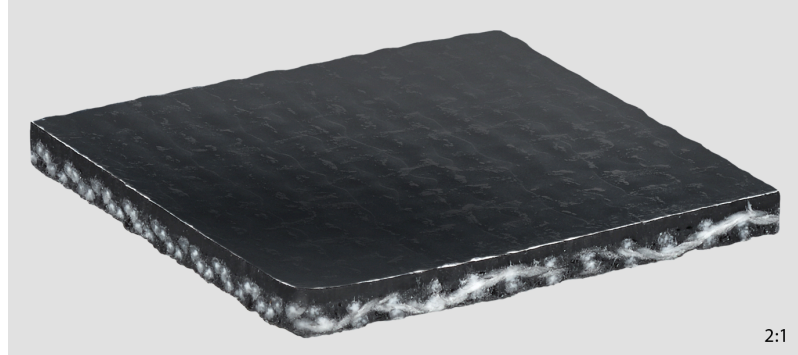

Art. No.: 908046

M 1:2

Applications

Agriculture

General material handling

Horizontal conveying (metering); Troughed conveyor belt

Leather manufacturing

Logistics

Order information

Article number	908046
Suitable for corrugated side walls	Yes
Belt style	PVC = Interwoven PVC
Standard delivery width	1829 mm / 72.01 in
Longitudinal seam possible	Yes

PVC120 P CxB-NA black

Construction

Top face material	Polyvinyl chloride, hard
Surface pattern	Smooth
Coating thickness	1.02 mm / 0.04 in
Color	Black
Driving face material	Polyester fabric, brushed
Surface pattern	Fabric, coarse
Color	Black
Tension member material	2-ply interwoven fabric of polyester spun warp and weft
Number of fabric plies	1

Technical data

Total thickness	3.35 mm \pm 0.25 0.132 in \pm 0.01
Weight	4.15 kg/m ² \pm 0.42 0.85 lbs/ft ² \pm 0.085
k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005	8.5 N/mm / 48.54 lbf/in
Recommended Elongation at fitting min.	0.5 %
Recommended Elongation at fitting max.	1.5 %
Rated working tension	21 N/mm / 120 lbf/in at 2 % Elongation
Friction coefficient of driving face against steel panel according ISO 21182	0.35
Friction coefficient of top face against steel panel according ISO 21182	0.8
Permissible operating temperature	-18/82 °C 0/180 °F
Hardness of top face coating as per DIN 53505 (Shore A)	80

PVC120 P CxB-NA black

Properties

Lateral stiffness	Laterally flexible
Troughable	Yes
Suitable for accumulation	No
Inclined conveying	No
Suitable for knife edges	No
Suitable for curves	Yes
Flame-retardant	No
Noise development	Normal
Particular surface properties	<ul style="list-style-type: none"> ▸ Good grip ▸ Coating/fabric abrasion resistant ▸ Good cut resistance
Belt support	Slider bed (support rollers possible)
UV resistance	Normal

Electrostatic properties

Not antistatic	Belt material with electrically insulating properties
----------------	---

Fabrication

Suitable for corrugated side walls	Yes
Profiles on top face	Yes
Profiles on underside	Yes
Mechanical fasteners	On request

Minimum drum diameter

Z-splice, counter-bending	64 mm / 2.5 in
---------------------------	----------------

Remarks

Chemical resistance	Good
---------------------	------

The physical data in this data sheet is approximate, can alter depending on production environments and was established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN

PVC120 P CxB-NA black

50014/ISO 554. Fluctuations in climate can cause variations.

Date of last change: 3/12/2024 10:38:30 AM