


Product Data Sheet

PVC200 CVT2xB-NA black FR

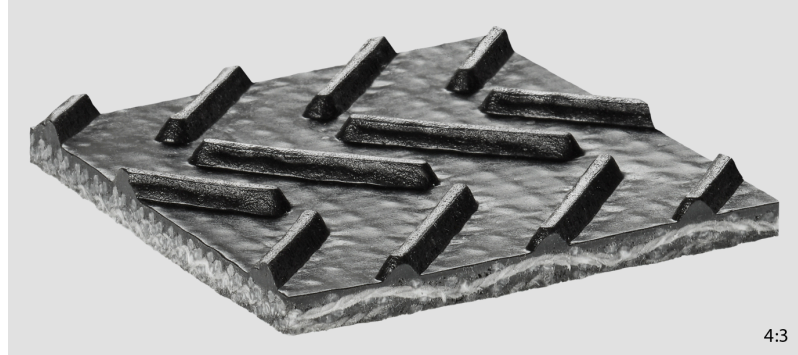

Art. No.: 908048

M 1:2

Applications

General material handling	Horizontal conveying and inclined conveying of small components / bulky goods; Troughed conveyor belt
Logistics	Parcel handling

Order information

Article number	908048
Suitable for corrugated side walls	No
Belt style	PVC = Interwoven PVC
Standard delivery width	1067 mm / 42.01 in
Longitudinal seam possible	Yes

PVC200 CVT2xB-NA black FR

Construction

Top face material	Polyvinyl chloride
Surface pattern	Chevron top, standard
Coating thickness	5.08 mm / 0.2 in
Color	Black
Driving face material	Polyester fabric, brushed
Surface pattern	Fabric, coarse
Color	Black
Tension member material	3-ply interwoven fabric of polyester spun warp and weft
Number of fabric plies	1

Technical data

Total thickness	7.75 mm ± 0.39 0.305 in ± 0.015
Weight	6.35 kg/m ² ± 0.32 1.3 lbs/ft ² ± 0.065
k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005	13.13 N/mm / 75 lbf/in
Recommended Elongation at fitting min.	0.5 %
Recommended Elongation at fitting max.	1.5 %
Rated working tension	35 N/mm / 200 lbf/in at 2 % Elongation
Friction coefficient of driving face against steel panel according ISO 21182	0.3
Friction coefficient of top face against steel panel according ISO 21182	0.7
Permissible operating temperature	-18/82 °C 0/180 °F
Hardness of top face coating as per DIN 53505 (Shore A)	65

PVC200 CVT2xB-NA black FR

Properties

Lateral stiffness	Laterally flexible
Troughable	Yes
Suitable for accumulation	No
Inclined conveying	Yes
Suitable for knife edges	No
Suitable for curves	No
Flame-retardant	FR (ASTM D-378)
Noise development	Normal
Belt support	Slider bed (support rollers possible)
UV resistance	Normal

Electrostatic properties

Not antistatic	Belt material with electrically insulating properties
-----------------------	---

Fabrication

Suitable for corrugated side walls	No
Profiles on top face	No
Profiles on underside	Yes
Mechanical fasteners	Alligator®RS187; Clipper® #3

Minimum drum diameter

Z-splice, counter-bending	127 mm / 5 in
Mechanical Alligator® fastener, bending	102 mm / 4 in
Mechanical Clipper® fastener, bending	102 mm / 4 in

Remarks

Chemical resistance	Good
----------------------------	------

The physical data in this data sheet is approximate, can alter depending on production environments and was established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN 50014/ISO 554. Fluctuations in climate can cause variations.

PVC200 CVT2xB-NA black FR

Date of last change: 8/9/2024 11:45:45 AM