


Product Data Sheet

## PHR2-90NMF MRTxBB-NA black FR

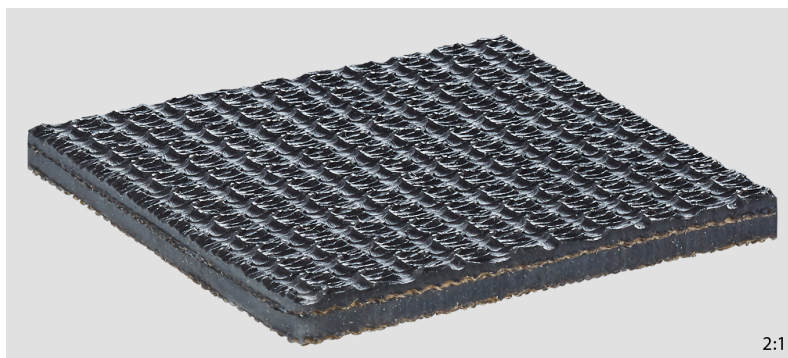

Art. No.: 908257

M 1:2

### Applications

#### Airport logistics

<b>General material handling</b>	Horizontal conveying; Inclined conveying of unit goods / containers
----------------------------------	---

<b>Logistics</b>	Braking conveyor
------------------	------------------

### Order information

<b>Article number</b>	908257
-----------------------	--------

<b>Suitable for corrugated side walls</b>	No
---	----

<b>Belt style</b>	PHR = Package Handling Rubber
-------------------	-------------------------------

<b>Standard delivery width</b>	991 mm / 39.02 in
--------------------------------	-------------------

<b>Longitudinal seam possible</b>	No
-----------------------------------	----

### PHR2-90NMF MRTxBB-NA black FR

#### Construction

<b>Top face material</b>	Styrene butadiene rubber
<b>Surface pattern</b>	Rough-top, mini
<b>Coating thickness</b>	1.52 mm / 0.06 in
<b>Color</b>	Black
<b>Driving face material</b>	Resorcinol formaldehyde latex impregnation
<b>Surface pattern</b>	Fabric
<b>Color</b>	Black
<b>Tension member material</b>	Fabric of nylon filament warp and monofilament weft
<b>Number of fabric plies</b>	2

#### Technical data

<b>Total thickness</b>	4.06 mm ± 0.41 0.16 in ± 0.016
<b>Weight</b>	4.59 kg/m <sup>2</sup> ± 0.46 0.94 lbs/ft <sup>2</sup> ± 0.094
<b>k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005</b>	4.73 N/mm / 27 lbf/in
<b>Recommended Elongation at fitting min.</b>	0.3 %
<b>Recommended Elongation at fitting max.</b>	1.5 %
<b>Rated working tension</b>	16 N/mm / 90 lbf/in at 2 % Elongation
<b>Friction coefficient of driving face against steel panel according ISO 21182</b>	0.2
<b>Permissible operating temperature</b>	-29/107 °C -20/225 °F

### PHR2-90NMF MRTxBB-NA black FR

#### Properties

<b>Lateral stiffness</b>	Laterally stiff
<b>Troughable</b>	No
<b>Suitable for accumulation</b>	No
<b>Inclined conveying</b>	Yes
<b>Suitable for knife edges</b>	No
<b>Suitable for curves</b>	No
<b>Flame-retardant</b>	FR (ASTM D-378)
<b>Noise development</b>	Normal
<b>Particular surface properties</b>	<ul style="list-style-type: none"> <li>▶ Good grip</li> <li>▶ Coating/fabric abrasion resistant</li> <li>▶ Good cut resistance</li> </ul>
<b>Belt support</b>	Slider bed (support rollers possible)
<b>UV resistance</b>	Normal

#### Electrostatic properties

<b>Not antistatic</b>	Belt material with electrically insulating properties
-----------------------	---

#### Fabrication

<b>Suitable for corrugated side walls</b>	No
<b>Profiles on top face</b>	No
<b>Profiles on underside</b>	Yes
<b>Mechanical fasteners</b>	Alligator®RS125; Clipper® U2

#### Minimum drum diameter

<b>Mechanical Alligator® fastener, bending</b>	89 mm / 3.5 in
<b>Mechanical Clipper® fastener, bending</b>	89 mm / 3.5 in
<b>Wedge overlap splice, counter-bending</b>	127 mm / 5 in
<b>Wedge overlap splice, bending</b>	89 mm / 3.5 in

### PHR2-90NMF MRTxBB-NA black FR

#### Remarks

---

<b>Chemical resistance</b>	R
----------------------------	---

---

The physical data in this data sheet is approximate, can alter depending on production environments and was established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN 50014/ISO 554. Fluctuations in climate can cause variations.

Date of last change: 8/29/2024 10:49:52 AM