


Product Data Sheet

PVC350 ORG CxC black FR

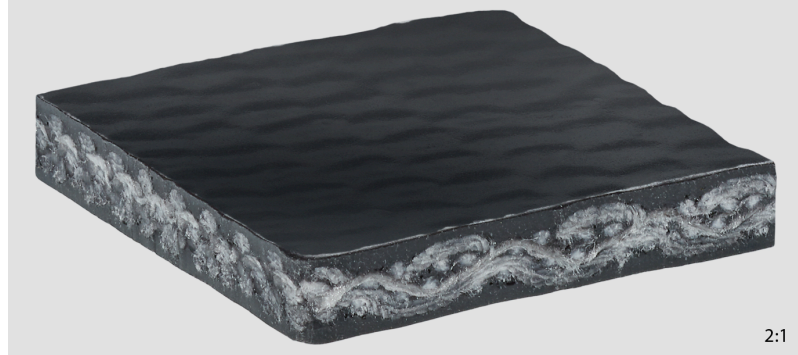

Art. No.: 908736

M 1:2

Applications

Agriculture

General material handling Elevator belt; Troughed conveyor belt

Special applications Base for brushes

Order information

Article number 908736

Suitable for corrugated side walls Yes

Belt style PVC = Interwoven PVC

Standard delivery width 1829 mm / 72.01 in

Longitudinal seam possible Yes

PVC350 ORG CxC black FR

Construction

Top face material	Polyvinyl chloride, oil and fat resistant
Surface pattern	Smooth
Coating thickness	1.52 mm / 0.06 in
Color	Black
Driving face material	Polyvinyl chloride, oil and fat resistant
Surface pattern	Smooth
Coating thickness	1.52 mm / 0.06 in
Color	Black
Tension member material	2-ply interwoven fabric of polyester spun and filament warp and weft
Number of fabric plies	1

Technical data

Total thickness	7.75 mm ± 0.39 0.305 in ± 0.015
Weight	9.76 kg/m ² ± 0.49 2 lbs/ft ² ± 0.1
k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005	16.64 N/mm / 95 lbf/in
Recommended Elongation at fitting min.	0.5 %
Recommended Elongation at fitting max.	1.5 %
Rated working tension	61 N/mm / 350 lbf/in at 2 % Elongation
Friction coefficient of driving face against steel panel according ISO 21182	0.85
Friction coefficient of top face against steel panel according ISO 21182	0.85
Permissible operating temperature	-18/82 °C 0/180 °F
Hardness of top face coating as per DIN 53505 (Shore A)	80

PVC350 ORG CxC black FR

Properties

Lateral stiffness	Laterally stiff
Troughable	Limited
Suitable for accumulation	No
Inclined conveying	No
Suitable for knife edges	No
Suitable for curves	No
Flame-retardant	FR (ASTM D-378 & MSHA 2G)
Noise development	Normal
Particular surface properties	<ul style="list-style-type: none"> ▶ Good grip ▶ Coating/fabric abrasion resistant ▶ Good cut resistance
Belt support	Support rollers
UV resistance	Normal

Electrostatic properties

Antistatic	Belt material with an electrically conductive antistatic agent. Volume resistance (RDi) in longitudinal direction parallel to plane of belt $< 3 \times 10^8 \Omega$. Measurement according DIN EN ISO 21178.
-------------------	--

Fabrication

Suitable for corrugated side walls	Yes
Profiles on top face	Yes
Profiles on underside	Yes
Mechanical fasteners	HS-26; Clipper® #6; CS-06

PVC350 ORG CxC black FR

Minimum drum diameter

Mechanical Clipper® fastener, bending	164 mm / 6.4 in
Mechanical CS fastener, bending	164 mm / 6.4 in
Mechanical HS fastener, bending	164 mm / 6.4 in
Wedge overlap splice, bending	164 mm / 6.4 in
Z-splice, bending	164 mm / 6.4 in

Remarks

► Suitable for whole oily grains.

Chemical resistance V

The physical data in this data sheet is approximate, can alter depending on production environments and was established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN 50014/ISO 554. Fluctuations in climate can cause variations.

Date of last change: 10/25/2024 10:57:14 AM