


Product Data Sheet

FTP2-100 OFR CxF-NA white FDA

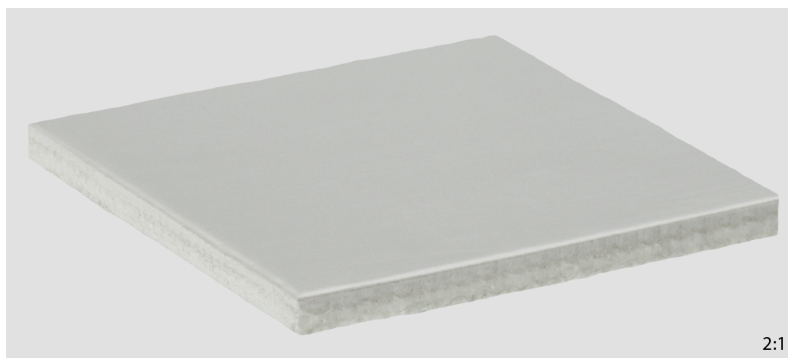

Art. No.: 908829

M 1:2

Applications

Agriculture	Processing of fruits and vegetables (also oily and fatty)
Fish industry & meat industry	Meat processing
Food industry	Processing of food (also oily and fatty)
General material handling	Horizontal conveying; Troughed conveyor belt

Order information

Article number	908829
Suitable for corrugated side walls	Yes
Belt style	FTP = Forbo Transtex Plied
Standard delivery width	1829 mm / 72.01 in
Longitudinal seam possible	Yes

FTP2-100 OFR CxF-NA white FDA

Construction

Top face material	Polyvinyl chloride, oil and fat resistant
Surface pattern	Smooth
Coating thickness	1.02 mm / 0.04 in
Color	White
Driving face material	Polyvinyl chloride, oil and fat resistant
Surface pattern	Fabric
Coating thickness	0.1 mm / 0.004 in
Color	White
Tension member material	Fabric of polyester spun warp and weft
Number of fabric plies	2
Driving face weave	Plain weave

Technical data

Total thickness	2.92 mm ± 0.29 0.115 in ± 0.012
Weight	3.91 kg/m ² ± 0.39 0.8 lbs/ft ² ± 0.08
k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005	7.89 N/mm / 45.04 lbf/in
Recommended Elongation at fitting min.	0.3 %
Rated working tension	18 N/mm / 100 lbf/in at 2 % Elongation
Friction coefficient of driving face against steel panel according ISO 21182	0.45
Friction coefficient of top face against steel panel according ISO 21182	0.9
Permissible operating temperature	-18/82 °C 0/180 °F
Hardness of top face coating as per DIN 53505 (Shore A)	80

FTP2-100 OFR CxF-NA white FDA

Properties

Lateral stiffness	Laterally flexible
Troughable	Yes
Suitable for accumulation	No
Inclined conveying	No
Suitable for knife edges	No
Suitable for curves	No
Flame-retardant	No
Noise development	Normal
Particular surface properties	► Good grip
Belt support	Support rollers
UV resistance	Normal

Food properties

FDA 21CFR	Suitable for the transport of unpacked Food in compliance with FDA regulation 21CFR
------------------	---

Electrostatic properties

Not antistatic	Belt material with electrically insulating properties
-----------------------	---

Fabrication

Suitable for corrugated side walls	Yes
Profiles on top face	Yes
Profiles on underside	Yes
Mechanical fasteners	Alligator®RS62; Clipper® 1SP; Clipper® G006; Clipper® UX1SP

Minimum drum diameter

Z-splice, counter-bending	64 mm / 2.5 in
Mechanical Alligator® fastener, bending	51 mm / 2 in
Mechanical Alligator® fastener, bending	51 mm / 2 in

FTP2-100 OFR CxF-NA white FDA

Remarks

Chemical resistance	V
----------------------------	---

The physical data in this data sheet is approximate, can alter depending on production environments and was established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN 50014/ISO 554. Fluctuations in climate can cause variations.

Date of last change: 8/29/2024 10:49:52 AM