


Product Data Sheet

UTILITY 2-160 GRADE II 1/32x1/32-NA

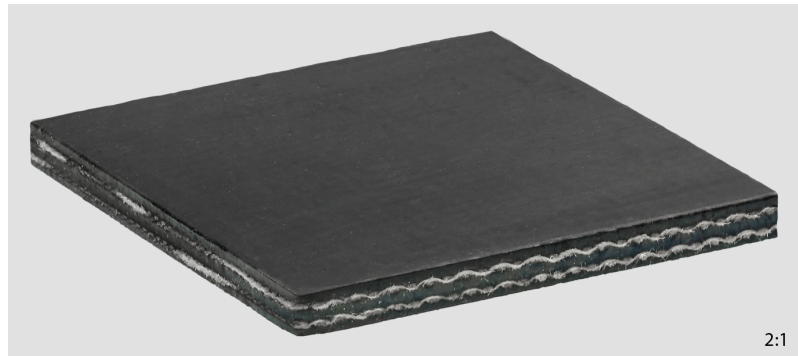

Art. No.: 908860

M 1:2

Applications

Agriculture	Harvesting machines
General material handling	Troughed conveyor belt

Order information

Article number	908860
Suitable for corrugated side walls	No
Belt style	Utility = General Purpose Plied Rubber
Standard delivery width	1829 mm / 72.01 in
Longitudinal seam possible	Yes

UTILITY 2-160 GRADE II 1/32x1/32-NA

Construction

Top face material	General Purpose Plied Rubber, Grade II
Surface pattern	Semi smooth
Coating thickness	0.79 mm / 0.031 in
Color	Black
Driving face material	General Purpose Plied Rubber, Grade II
Surface pattern	Semi smooth
Coating thickness	0.76 mm / 0.03 in
Color	Black
Tension member material	Fabric of polyester filament warp and weft
Weave pattern	2

Technical data

Total thickness	3.91 mm \pm 0.38 0.154 in \pm 0.015
Weight	4.78 kg/m ² \pm 0.48 0.98 lbs/ft ² \pm 0.098
k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005	12 N/mm / 68.52 lbf/in
Recommended Elongation at fitting min.	0.3 %
Rated working tension	28 N/mm / 160 lbf/in at 2 % Elongation
Friction coefficient of driving face against steel panel according ISO 21182	0.75
Permissible operating temperature	-29/107 °C -20/225 °F

UTILITY 2-160 GRADE II 1/32x1/32-NA

Properties

Lateral stiffness	Conditionally laterally stiff
Troughable	Yes
Suitable for accumulation	No
Inclined conveying	No
Suitable for knife edges	No
Suitable for curves	No
Flame-retardant	No
Noise development	Normal
Particular surface properties	<ul style="list-style-type: none"> ▸ Good grip ▸ Coating/fabric abrasion resistant
Coating/fabric exceptionally cut resistant	Yes
Belt support	Support rollers
UV resistance	Normal

Electrostatic properties

Not antistatic	Belt material with electrically insulating properties
----------------	---

Fabrication

Suitable for corrugated side walls	No
Profiles on top face	No
Profiles on underside	No
Mechanical fasteners	On request

Minimum drum diameter

Z-splice, counter-bending	164 mm / 6.5 in
Mechanical fastener, bending	102 mm / 4 in

Remarks

Chemical resistance	Low
---------------------	-----

UTILITY 2-160 GRADE II 1/32x1/32-NA

The physical data in this data sheet is approximate, can alter depending on production environments and was established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN 50014/ISO 554. Fluctuations in climate can cause variations.

Date of last change: 5/5/2021 9:23:05 AM