


Product Data Sheet

PVC150 P CxB-NA black

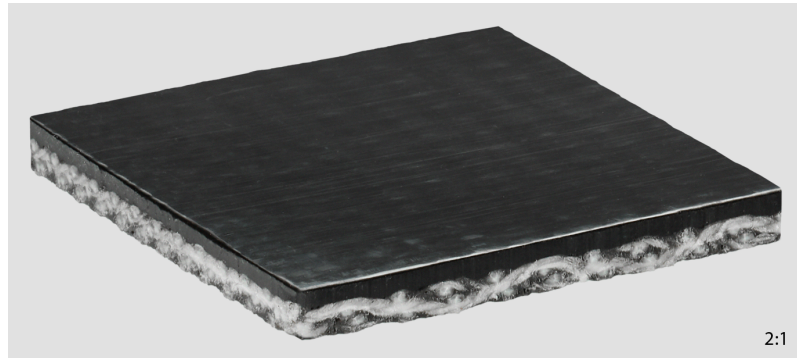

Art. No.: 908910

M 1:2

Applications

Agriculture

General material handling Horizontal conveying (metering)

Logistics Feeder conveyor/ Transfer conveyor

Metalworking & automotive industry

Order information

Article number 908910

Suitable for corrugated side walls Yes

Belt style PVC = Interwoven PVC

Standard delivery width 1829 mm / 72.01 in

Longitudinal seam possible Yes

PVC150 P CxB-NA black

Construction

Top face material	Polyvinyl chloride, hard
Surface pattern	Smooth
Coating thickness	1.02 mm / 0.04 in
Color	Black
Driving face material	Polyester fabric, brushed
Surface pattern	Fabric, coarse
Color	Black
Tension member material	2-ply interwoven fabric of polyester spun warp and weft
Number of fabric plies	1

Technical data

Total thickness	4.06 mm \pm 0.25 0.16 in \pm 0.01
Weight	4.88 kg/m ² \pm 0.49 1 lbs/ft ² \pm 0.1
k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005	8 N/mm / 45.68 lbf/in
Recommended Elongation at fitting min.	0.5 %
Recommended Elongation at fitting max.	1.5 %
Rated working tension	26 N/mm / 150 lbf/in at 2 % Elongation
Friction coefficient of driving face against steel panel according ISO 21182	0.35
Friction coefficient of top face against steel panel according ISO 21182	0.8
Permissible operating temperature	-18/82 °C 0/180 °F
Hardness of top face coating as per DIN 53505 (Shore A)	80

PVC150 P CxB-NA black

Properties

Lateral stiffness	Laterally flexible
Troughable	Yes
Suitable for accumulation	No
Inclined conveying	No
Suitable for knife edges	No
Suitable for curves	No
Flame-retardant	No
Noise development	Normal
Particular surface properties	► Good grip
Belt support	Slider bed (support rollers possible)
UV resistance	Normal

Electrostatic properties

Not antistatic	Belt material with electrically insulating properties
----------------	---

Fabrication

Suitable for corrugated side walls	Yes
Profiles on top face	Yes
Profiles on underside	Yes
Mechanical fasteners	On request

Minimum drum diameter

Z-splice, counter-bending	51 mm / 2 in
Wedge overlap splice, counter-bending	90 mm / 3.5 in

Remarks

Chemical resistance	Good
---------------------	------

The physical data in this data sheet is approximate, can alter depending on production environments and was established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN 50014/ISO 554. Fluctuations in climate can cause variations.

PVC150 P CxB-NA black

Date of last change: 3/12/2024 10:38:30 AM