


Product Data Sheet

PVC150 HI RTxB-NA green

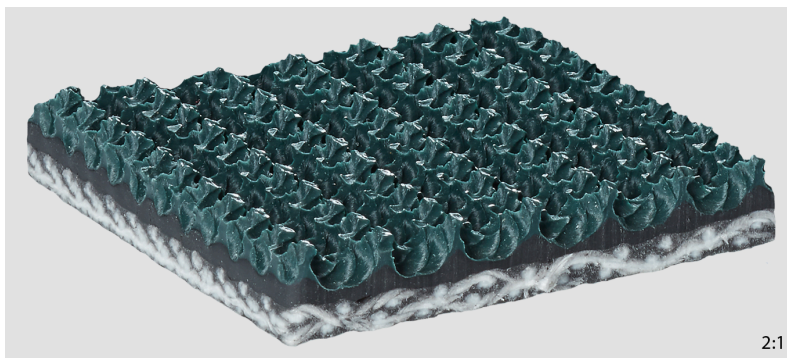

Art. No.: 908019

M 1:2

Applications

General material handling	Inclined conveying of unit goods / containers
Wood industry	Board conveying

Order information

Article number	908019
Suitable for corrugated side walls	No
Belt style	PVC = Interwoven PVC
Standard delivery width	1829 mm / 72.01 in
Longitudinal seam possible	Yes

PVC150 HI RTxB-NA green

Construction

Top face material	Polyvinyl chloride, low durometer
Surface pattern	Rough-top, fabric embossing
Coating thickness	5.08 mm / 0.2 in
Color	Green
Driving face material	Polyester fabric, brushed
Surface pattern	Fabric, coarse
Color	Green
Tension member material	2-ply interwoven fabric of polyester spun warp and weft
Number of fabric plies	1

Technical data

Total thickness	7.37 mm ± 0.37 0.29 in ± 0.014
Weight	5.86 kg/m ² ± 0.29 1.2 lbs/ft ² ± 0.06
k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005	9.63 N/mm / 55 lbf/in
Recommended Elongation at fitting min.	0.5 %
Recommended Elongation at fitting max.	1.5 %
Rated working tension	26 N/mm / 150 lbf/in at 2 % Elongation
Friction coefficient of driving face against steel panel according ISO 21182	0.3
Permissible operating temperature	-18/82 °C 0/180 °F
Hardness of top face coating as per DIN 53505 (Shore A)	39

PVC150 HI RTxB-NA green

Properties

Lateral stiffness	Laterally flexible
Troughable	Yes
Suitable for accumulation	No
Inclined conveying	Yes
Suitable for knife edges	No
Suitable for curves	No
Flame-retardant	No
Noise development	Normal
Particular surface properties	► Excellent grip
Belt support	Slider bed (support rollers possible)
UV resistance	Normal

Electrostatic properties

Not antistatic	Belt material with electrically insulating properties
-----------------------	---

Fabrication

Suitable for corrugated side walls	No
Profiles on top face	No
Profiles on underside	Yes
Mechanical fasteners	Alligator®RS187; Clipper® #3; Clipper® U3

Minimum drum diameter

Z-splice, counter-bending	89 mm / 3.5 in
Mechanical Alligator® fastener, bending	102 mm / 4 in
Mechanical Clipper® fastener, bending	76 mm / 3 in

Remarks

Chemical resistance	V
----------------------------	---

The physical data in this data sheet is approximate, can alter depending on production environments and was

PVC150 HI RTxB-NA green

established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN 50014/ISO 554. Fluctuations in climate can cause variations.

Date of last change: 8/29/2024 10:49:52 AM