


### Product Data Sheet

# PVC250 ORG CxC black FR

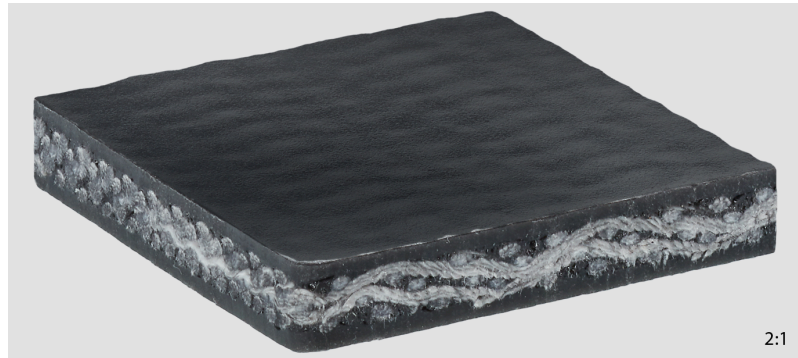

Art. No.: 908710

M 1:2

### Applications

<b>General material handling</b>	Elevator belt; Troughed conveyor belt
<b>Tire/Rubber</b>	

### Order information

<b>Article number</b>	908710
<b>Suitable for corrugated side walls</b>	On request
<b>Belt style</b>	PVC = Interwoven PVC
<b>Standard delivery width</b>	1829 mm / 72.01 in
<b>Longitudinal seam possible</b>	Yes

### PVC250 ORG CxC black FR

#### Construction

<b>Top face material</b>	Polyvinyl chloride, oil and fat resistant
<b>Surface pattern</b>	Smooth
<b>Coating thickness</b>	1.02 mm / 0.04 in
<b>Color</b>	Black
<b>Driving face material</b>	Polyvinyl chloride, oil and fat resistant
<b>Surface pattern</b>	Smooth
<b>Coating thickness</b>	1.02 mm / 0.04 in
<b>Color</b>	Black
<b>Tension member material</b>	3-ply interwoven fabric of polyester spun warp and weft
<b>Number of fabric plies</b>	1

#### Technical data

<b>Total thickness</b>	6.6 mm ± 0.33 0.26 in ± 0.013
<b>Weight</b>	8.54 kg/m <sup>2</sup> ± 0.48 1.75 lbs/ft <sup>2</sup> ± 0.098
<b>k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005</b>	15.76 N/mm / 90 lbf/in
<b>Recommended Elongation at fitting min.</b>	0.5 %
<b>Recommended Elongation at fitting max.</b>	1.5 %
<b>Rated working tension</b>	44 N/mm / 250 lbf/in at 2 % Elongation
<b>Friction coefficient of driving face against steel panel according ISO 21182</b>	0.85
<b>Friction coefficient of top face against steel panel according ISO 21182</b>	0.85
<b>Permissible operating temperature</b>	-18/82 °C 0/180 °F
<b>Hardness of top face coating as per DIN 53505 (Shore A)</b>	80

### PVC250 ORG CxC black FR

#### Properties

<b>Lateral stiffness</b>	Laterally flexible
<b>Troughable</b>	Yes
<b>Suitable for accumulation</b>	No
<b>Inclined conveying</b>	No
<b>Suitable for knife edges</b>	No
<b>Suitable for curves</b>	No
<b>Flame-retardant</b>	FR (ASTM D-378)
<b>Noise development</b>	Normal
<b>Particular surface properties</b>	<ul style="list-style-type: none"> <li>▶ Good grip</li> <li>▶ Coating/fabric abrasion resistant</li> <li>▶ Good cut resistance</li> </ul>
<b>Belt support</b>	Support rollers
<b>UV resistance</b>	Normal

#### Electrostatic properties

<b>Antistatic</b>	Belt material with an electrically conductive antistatic agent. Volume resistance (RDi) in longitudinal direction parallel to plane of belt <math>< 3 \times 10^8 \Omega</math>. Measurement according DIN EN ISO 21178.
-------------------	--

#### Fabrication

<b>Suitable for corrugated side walls</b>	On request
<b>Profiles on top face</b>	Yes
<b>Profiles on underside</b>	Yes
<b>Mechanical fasteners</b>	Clipper® #4-1/2

#### Minimum drum diameter

<b>Z-splice, counter-bending</b>	152 mm / 6 in
<b>Mechanical Clipper® fastener, bending</b>	127 mm / 5 in

### PVC250 ORG CxC black FR

#### Remarks

---

► Suitable for whole oily grains.

---

Chemical resistance V

---

The physical data in this data sheet is approximate, can alter depending on production environments and was established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN 50014/ISO 554. Fluctuations in climate can cause variations.

Date of last change: 10/28/2024 12:44:38 PM